


PTFE-SS BRAIDED SILICONE COVER HOSE (PIXFSF) & (PIXFSFAS)

Purity One is the premier flex hose source nationally. Our new state-of-the-art hose assembly and testing facility allow us to be best-in-class by combining quality products, assembly services and premier customer service.

Purity One can assemble PTFE-SS braided silicone hoses with nearly any type of end connection desired.

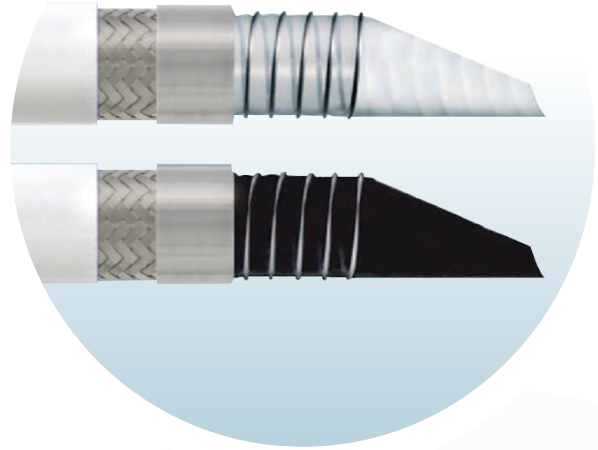

PRODUCT NUMBER	NOMINAL I.D.		O.D.		WORKING PRESSURE AT 70°F (21.1°C)		BURST PRESSURE AT 70°F (21.1°C)		MINIMUM BEND RADIUS		WEIGHT PER FOOT/METER	
	(in.)	(mm)	(in.)	(mm)	(PSI)	(BAR)	(PSI)	(BAR)	(in.)	(mm)	(lb.)	(kg)
(PIXFSF)												
PIXFSF-0250	1/2	11.5	5/6	20.8	725	50	3626	250	2	60	8.8	4
PIXFSF-0750	3/4	18.5	1 1/8	28.6	870	60	4206	290	3	80	19.8	9
PIXFSF-1000	1	22.8	1 2/7	32.7	580	40	3046	210	5	120	22.1	10
PIXFSF-1500	1 1/2	36.5	1 8/9	48.1	580	40	2538	175	7	175	38.6	17.5
PIXFSF-2000	2	48.5	2 3/8	60.2	363	25	1958	135	5	135	58.4	26.5
(PIXFSFAS) ANTI-STATIC												
PIXFSFAS-0250	1/2	11.5	5/6	20.8	725	50	3626	250	2	60	8.8	4
PIXFSFAS-0750	3/4	18.5	1 1/8	28.6	870	60	4206	290	3	80	19.8	9
PIXFSFAS-1000	1	22.8	1 2/7	32.7	580	40	3046	210	5	120	22.1	10
PIXFSFAS-1500	1 1/2	36.5	1 8/9	48.1	580	40	2538	175	7	175	38.6	17.5
PIXFSFAS-2000	2	48.5	2 3/8	60.2	363	25	1958	135	5	135	58.4	26.5

Features

- Available in standard or anti-static PTFE material
- Temperature range: -80°F (-60.3°C) to 400°F (204.4°C)
- Full vacuum rating
- Resists temperature extremes, compression set, chemical attack, moisture and environmental exposure
- Sterilizable by autoclave, CIP and SIP processes
- Purity One hose traceable with serial and lot numbers
- Purity One labeling system available
- 1-year warranty
- Purity One hose measuring system (available upon request)
- 24-hour emergency service available

Certifications

- Purity One Certificate of Conformance and test results with each order
- USP Class VI, FDA CFR 177.2600, ISO 1099 and European Pharmacopoeia 3.1.9 standards

Fittings

- Sanitary, EP
- Flange
- Pipe Thread
- Cam Lock
- Quick Disconnects
- Others (available upon request)

